

HIGHBOY TV CART - ASSEMBLY INSTRUCTIONS

NOTE: HAND TIGHTEN cap nuts and bolts. Over tightening will make it more difficult to line up component holes and will complicate the assembly process. When you have completed assembly of the entire cart, tighten all fasteners with wrenches provided.

STEP 1: Unwrap all components. Verify that you have all parts REQUIRED for assembly (refer to the enclosed Highboy Parts List). Extra parts may be included.

STEP 2: Attach two component shelves to side panels. (See figure 1) Make sure top and bottom braces fold outward and the vertical edges of side panels fold inward. Each side panel has two rows of holes that shelves will bolt into. Use bolts and cap nuts provided to attach shelves to side panels. Row of holes closest to the end of side panels will hold the upper shelf.

STEP 3: Once you have attached both shelves to side panels you're ready to attach top shelf to side panels. The top shelf will have 10 threaded studs that will align with two side panels and back plate. Note: Angled part of top shelf is the rear. (See figure 2) After placing top shelf on side panels attach with fasteners to hold in place while the rest of unit is being built. Finally attach the back plate to the top shelf using the remaining two studs. The back plate cord holes should match up flush to the shelves.

STEP 4: Attach base to unit. Adding the base last should make it easier for all pieces to fit perfectly. Make sure the cutout on the base faces the rear. Cutout will make it easier to attach back plate and handle shaped cord collector. It also acts as a storage area for any excess wire you may need to hide. Use two $\frac{3}{4}$ " bolts and two cap nuts to attach the back panel and cord collector to the base. Attach side panels to base also using four bolts and cap nuts per side.

NOTE: If you purchased your unit without casters skip STEP 5 and proceed to STEP 6

STEP 5: Attach the casters to bottom of base. Each caster will have a bolt to attach to the bottom of the base. Tighten bolts with wrench provided.

STEP 6: Use wrenches provided to tighten all fasteners.

Thank you and we hope you enjoy our products as much as we do. If you have any questions, please contact us (toll-free) at 877.804.7650 (M-F 8:30AM-5:30 PM PT) or e-mail: customerservice@boltz.com.

Figure 1

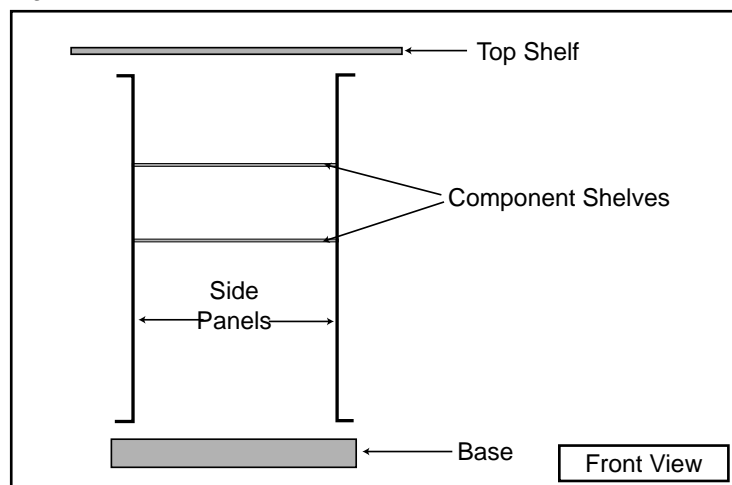


Figure 2

