

# BOLTZ

STEEL FURNITURE

## ASSEMBLY INSTRUCTIONS

### Satellite Speaker Stand

NOTE: When assembling make sure to hand tighten all flange and cap nuts. Once basic assembly is complete, you may securely tighten all flange nuts with a 1/2" wrench and cap nuts with a 9/16" wrench.


1. Attach a flange nut on to both ends of each upright rod with the flat part of the nut facing the end of the rod (see diagram).

2. The base plate should sit with the flanged edges pointing downwards to the floor. The front of the base is the widest side. Attach the rods to the base using flange nuts beneath the base. Each rod will be held into the base plate with two flange nuts, one on each side of the base plate.

3. Attach the top plate by placing it on top of the flange nuts which were screwed to the rods in step one. The ends of the rods should fit through the holes of the top plate. Like the base plate, the top plate should flange downward so that the top surface is flat.

4. The back plate should be set on back edge of the top plate before the cap nuts are secured. (Note: Back plate is optional and can be omitted depending on your preference.) The cutout of the back plate allows you to run your wire through. You may also attach your speaker to the stand using the cutout hole.

5. Included are vinyl strips which can be attached to the edges of the base. These strips are optional and are best for protecting hard surface floors from scratches.

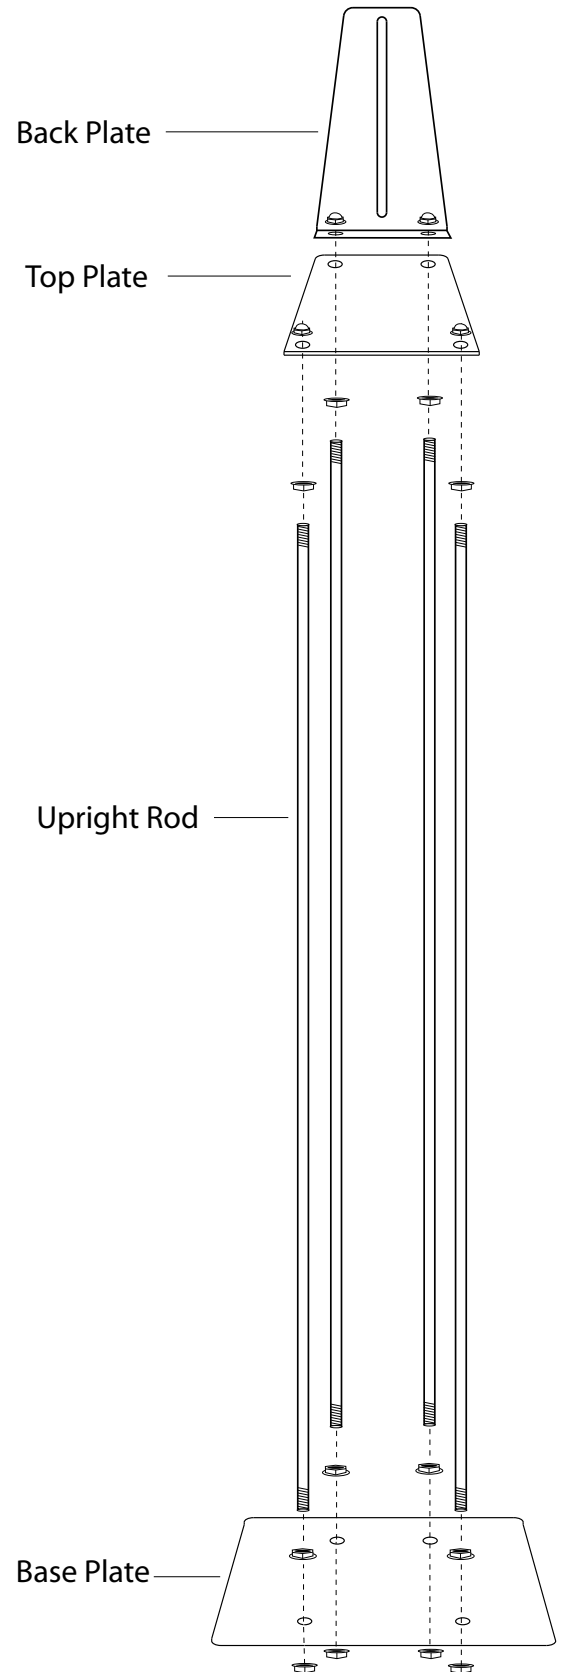

### PARTS LIST


(for two speaker stands)



Flange Nut - 24



Cap Nut - 8



Upright Rods - 8



Vinyl Strips - 4



Base Plate - 2



Top Plate - 2



Back Plate - 2